

AXFUEL® SRF30

Product information sheet: Solid recovered fuel

Description:

Axfuel® SRF30 is a sub-30mm sized mixture of textiles, fibre-fluff, plastic, foam and rubber derived from an advanced materials sorting facility in Manchester, UK. The alternative fuel material will contain some wood, paper and other minor components.

Axfuel® SRF30 is a consistent and reliable material with high CV and stable physical and chemical properties which are constantly monitored by our on-site quality laboratory team.


Source:

Axfuel® SRF30 originates from the waste residues of large-scale metal recycling plants. A unique separation and sorting process is used to extract a quality-controlled alternative fuel for use in energy generation and other thermal processes.

Availability:

Axfuel® SRF30 is available for delivery in bulk loads of 20-26 tonnes throughout the whole year.

Composition:

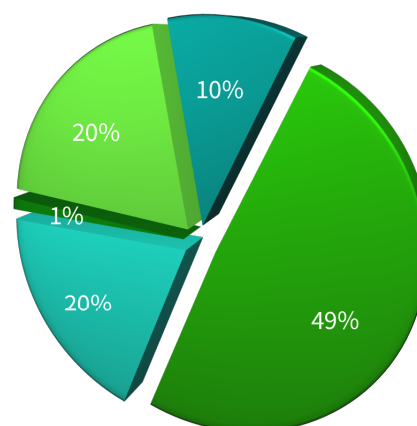

- Plastics & rubber (20%)
- Textiles & foam (49%)
- Inerts (1%)
- Wood (10%)
- Fines <4mm (20%)



www.axiongroup.co.uk/AxfuelSRF

Tenax Road, Trafford Park, Manchester. M17 1JT
Tel. +44 161 737 6124
E. info@axionpolymers.co.uk

AXFUEL® SRF30

Product information sheet: Solid recovered fuel

Product physical properties

Product grade: Axfuel® SRF30

Test parameter	Mean value	Units
Net CV	15-20	MJ/Kg
Particle size	>99 % is <30mm 30% is <5mm	% %
Ash (dry basis)	25-30	%
Moisture	10-20	%
Chlorides	0.7 +/- 0.4	%
Copper	0.7 +/- 0.4	%

More detailed analytical data and trend graphs can be provided on request.

Disclaimer:

Numerical data are provided in good faith based on measurements and analysis using samples produced by automated process equipment.

Individual sample results may vary from those shown. Moisture content subject to changes in weather conditions.

www.axiongroup.co.uk/AxfuelSRF

Tenax Road, Trafford Park, Manchester. M17 1JT
Tel. +44 161 737 6124
E. info@axionpolymers.co.uk